PLANT SCHEDULE

Symbol	Botanical Name	Common Name	Approx mature Height x Width (M)	Installation Size
	Trees			
Ap	*Acer palmatum*	Japanese Maple	6.0 x 5.0	35L
Gax	*Gordonia axillaris*	Fried Egg Tree	5.0 x 5.0	45L
Li	*Lagerstroemia indica*	Crepe Myrtle	6.0x 5.0	100L
Ms	*Magnolia grandiflora*	Bull Bay Magnolia	6.0 x 6.0	75L
MLG	*Magnolia grandiflora* 'Little Gem'	Dwarf Magnolia	5.0 x 3.0	75L
Ms	*Magnolia x soulangeana*	Saucer Magnolia	6.0 x 6.0	75L
Ns	*Nyssa salvatica*	Sour Gum	10.0 x 5.0	75L
Ss	*Sapium sebiferum*	Chinese Tallow Tree	10.0 x 7.0	75L
Wf	*Waterhousea floribunda*	Weeping Lilly Pilly	10.0 x 8.0	100L
	Mass Planting			
Aa	*Asplenium australasicum*	Birds Nest Fern	1.00 x 1.50	200mm
Ao	*Agapanthus praecox*	Agapanthus	1.00 x 0.75	150mm
Be	*Banksia ericifolia*	Heath Banksia	4.00 x 3.00	200mm
Bm	*Buxus microphylla*	Japanese Box	1.00 x 1.00	200mm
Cc	*Clerodendrum tomentosum*	Hairy Clerodendrum	3.00 x 2.00	200mm
Ce	*Crowea exaiata* 'Bindalong'	Crowea	0.60 x 0.60	200mm
Cj	*Camellia japonica*	Camellia	3.00 x 4.00	200mm
Cm	*Cliva miniata*	Kafir Lily	0.60 x 0.60	150mm
Cs	*Camellia sasanqua*	Camellia	3.00 x 2.00	300mm
Cp	*Crinum pedunculatum*	Swamp Lily	0.60 x 1.00	150mm
Cv	*Callistemon viminalis*	Bottlebrush	3.00 x 2.50	200mm
De	*Doryanthes excelsa*	Gymea Lily	3.00 x 1.50	200mm
Dc	*Dianella caerula*	Flax Lily	0.50 x 0.50	150mm
Em	*Eriostemon myoporoides*	Wax Flower	1.50 x 1.50	200mm
Ga	*Gardenia augusta* 'Florida'	Gardenia	1.00 x 1.50	200mm
'Ga	*Gardenia augusta* 'Florida' in pot	Gardenia	1.00 x 1.50	200mm
Gh	*Grevillea* 'Hookeriana'	Grevillea	2.50 x 2.00	200mm
Lm	*Liriope muscari* 'Evergreen Giant'	Lily Turf	0.70 x 0.50	200mm
Ll	*Lomandra longifolia*	Mat Rush	0.90 x 0.90	150mm
Ls	*Lavandula stoechas*	French Lavender	0.75 x 0.75	150mm
Mp	*Murraya pariculata*	Orange Jessamine	1.50 x 1.50	200mm
Px	*Philodendon 'Xanadu'*	Philodendron	0.30 x 0.40	200mm
Sb	*Syzygium* 'Bush Christmas'	Syzygium	4.0 x 2.5	25L
Tj	*Trachelospermum jasminoides*	Star Jasmine	0.50 x spreading	150mm
Vh	*Viola hederacea*	Native Violet	0.50 x 0.30	150mm
Vo	*Viburnum odoratissimum*	Sweet Viburnum	2.00 x 1.50	200mm
	Ferns, Climbers and Groundcovers			
Pp	*Pandorea pandorana*	Wonga Wonga Vine	spreading	200mm
Bn	*Blechnum nudum*	Water Fern	0.7	150mm
Da	*Doodia aspera*	Rasp Fern	0.3	150mm
Mp	*Myoporum parvifolium*	Creeping Boobiala	0.50 x spreading	150mm
Gp	*Grevillea* 'Poorinda Royal Mantle'	Prostrate Grevillea	0.50 x spreading	150mm
Tj	*Hardenbergia violacea*	Star Jasmine	0.50 x spreading	150mm

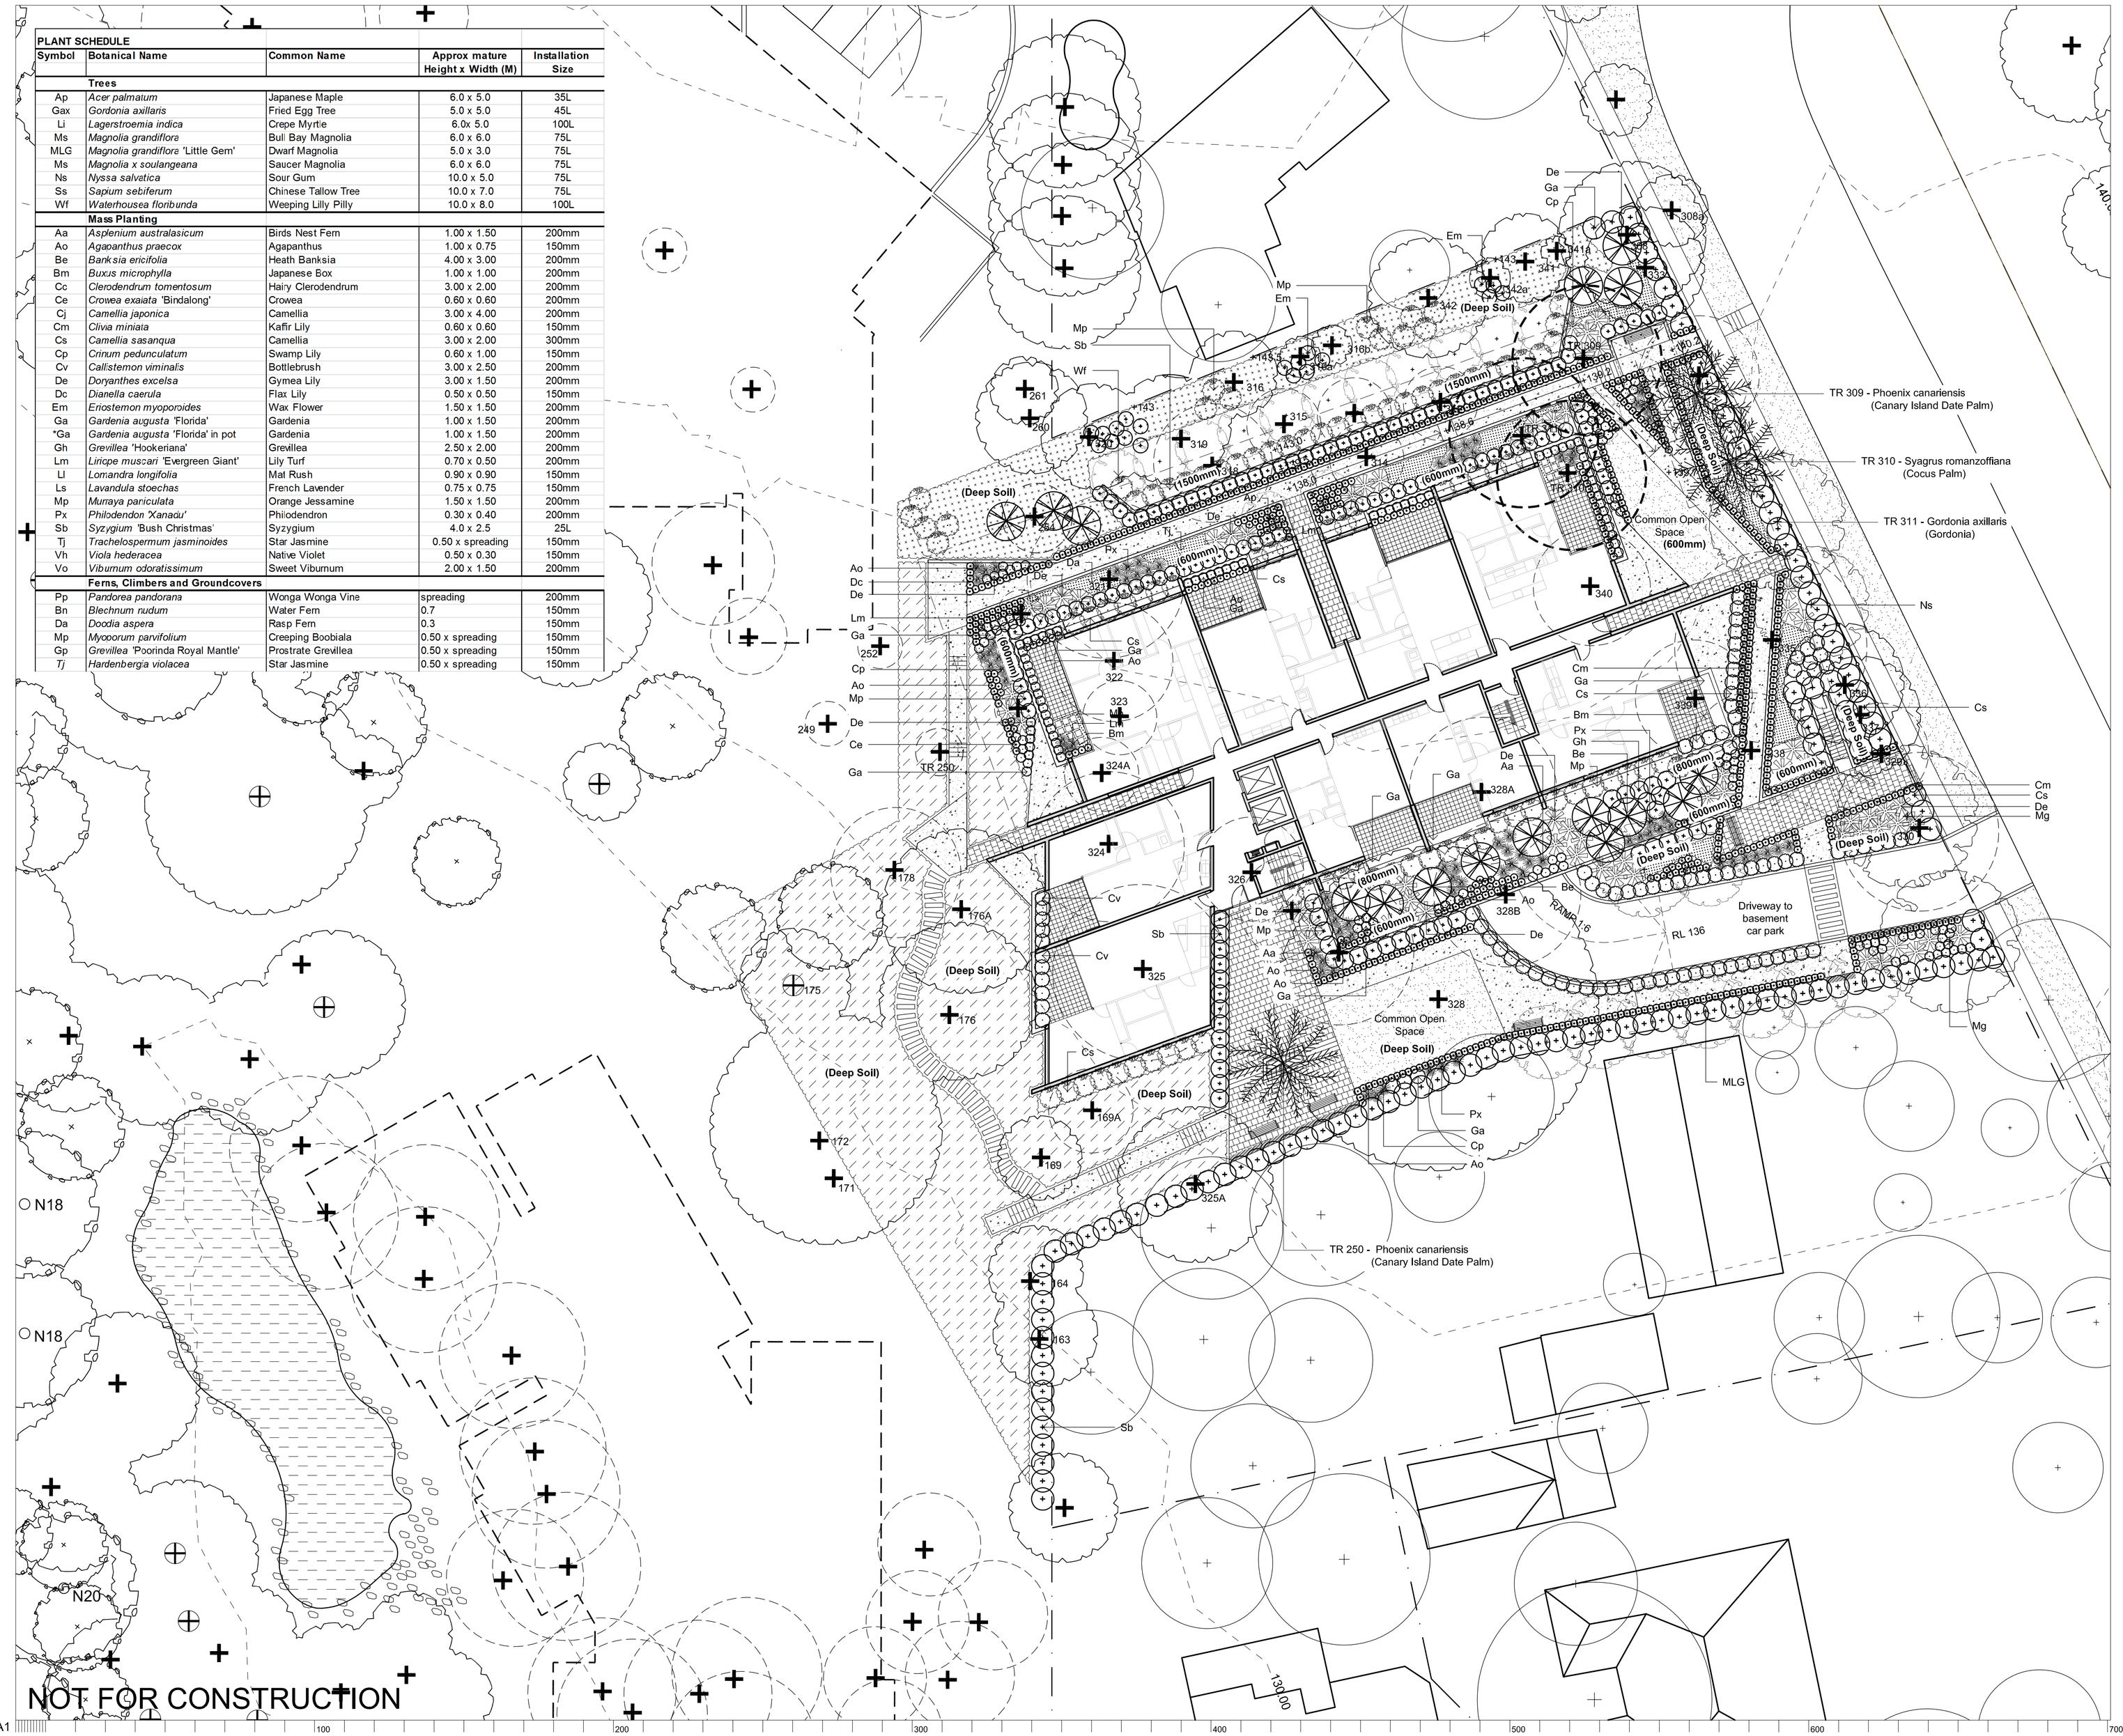

© 2012 Site Image (NSW) Pty Ltd ABN 44 801 262 380 as agent for Site Image NSW Partnership. All rights reserved. This drawing is copyright and shall not be reproduced or copied in any form or by any means (graphic, electronic or mechanical including photocopy) without the written permission of Site Image (NSW) Pty Ltd Any license, expressed or implied, to use this document for any purpose what so ever is restricted to the terms of the written agreement between Site Image (NSW) Pty Ltd and the Instructing party.

The contractor shall check and verify all work on site (including work by others) before commencing the landscape installation. Any discrepancies are to be reported to the Project Manager or Landscape Architect prior to commencing work. Do not scale this drawing. Any required dimensions not shown shall be referred to the Landscape Architect for confirmation.

Issue	Revision Description	Drawn	Check	Date
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
-	-	-	-	--.--.----
E	LEGEND AND SOIL DEPTHS INCLUDED	KA	RS	13.12.2012
D	DRIVEWAY AMENDMENT	PH	RS	04.12.2012
C	REVISED DRAWING NUMBERS	KA	RS	28.11.2012
B	DEVELOPMENT APPLICATION	KA	RS	28.11.2012
A	Preliminary	PH	RS	07.11.2012

LEGEND

- Trees to be removed
- Existing Trees to be retained
- Existing Native Canopy Trees to be Retained
- Existing Trees proposed Transplanted to new locations
- Proposed Trees (refer VMP Plan)
- Relocated Palms
- Proposed Garden Mass Planting / Soil Depths
- Managed Landscape Zone
- Turf
- Proposed Concrete Path (Min. 1.2m wide)
- Private Courtyard unit paving
- Feature unit paving to building entry
- Informal path - Stepping stones
- Permanent Pond
- Proposed Bench Seat
- Feature blade - screening element
- Retaining Walls

Client:
JW Neale Pty Ltd
(Recievers & Managers Appointed)

Project:
Avon Road Pymble
- Building 1

SITE IMAGE
Level 1, 3-5 Baptist Street
Surry Hills NSW 2010
Australia
Tel: (61 2) 8332 5600
Fax: (61 2) 9698 2877
www.siteimage.com.au
Site Image (NSW) Pty Ltd
ABN 44 801 262 380
Landscape Architects

DEVELOPMENT APPLICATION

Drawing Name:
LANDSCAPE PLAN

Scale: 1:500 @ A1 (0 2 5 10 15 25m)

Job Number:	Drawing Number:	Issue:
SS12-2482	DA - 001	E

A1 100 200 300 400 500 600 700